



Main Features

- Multi-zone display with video & audio, graphics, and text
- Update content and schedule over network without interrupting content playback
- Supports MPEG 1/2/4 and DivX 5.0 video format; JPEG and BMP graphics
- Supports 16:9 and 4:3 display in landscape or portrait mode
- Supports HDTV resolution; automatically scales up SD content to HD output
- Excellent reliability: fanless design with built-in heat dispersion
- Flexible scheduling capability
- Low energy consumption and RoHS compliant
- Optional AV-input function for external video & audio input EDS-2102 Series

Introduction

EDS-2102 series Network Digital Signage Platform receives media content such as video, audio, graphics, and text via an IP network, and stores the content on its internal hard disk drive. The content is displayed according to either a pre-defined playlist or network commands. The EDS-2102 series features the most advanced decoder and graphic processor available. It outputs both digital and analog video signals for modern, high definition display devices: plasma, LCD screens, and projectors. The EDS-2102 is an ideal networked digital content player for advertising, presentations, training, and other media applications.

Specifications

Player Contents		
Video	MPEG-1, MPEG-2 MP @ ML up to 14 Mbps, MPEG-4 ASP	
Audio	2 channels, MPEG-1 and MPEG-2 Layers I, II and III (MP3), 16-bit PCM, bit rate up to 384 kbps, sample rate up to 48 kHz	
Graphics	32-bit color with transparency BMP, JPEG	
Text	Scrollable text, variable scrolling speed and position	
Playlist	Scheduling playback, endless loop playback, auto play after power on	
Input and Output Ports		
Video Input *	Composite	1 x RCA jack
Audio Input *	R/L channel analog	2 x Unbalanced stereo RCA jack
Video Output	DVI digital and analog	1 x VESA DVI-I connector, up to 720P HD, 1280 x 720 @ 60 Hz
	Composite	1 x RCA jack
	S-Video	1 x Mini-DIN 4-pin connector
Audio Output	R/L channel analog	2 x Unbalanced stereo RCA jacks
Network	10/100 Mbps	1 x RJ-45 jack
Serial Port	RS-232	1 x D-sub 9-pin (male)
USB	USB 2.0 Host	2 x USB type A ports
Network Protocol	Supports HTTP, DHCP	
System		
Internal Storage	40 GB HDD (for DSA-2102), 512 MB Disk-on-Module (for DSA-2101)	
Dimensions (W x H x D)	211 x 153 x 43 mm (not including mounting bracket and I/O connector) (8.3" x 6" x 1.7")	
Net Weight	Approx. 1.7 kg (3.74 lb) (for EDS-2102); approx. 1.1 kg (2.42 lb) (for EDS-2101)	
Power Consumption	Approx. 15 W (for EDS-2102); approx. 7 W (for EDS-2101)	
Power Supply	DC 12V input	
Operating Temperature	0 to 40° C (32 ~ 104° F), Humidity 5 – 85% @ 40° C	

* AV-ins is an optional function only available with the EDS-2102V.

EDS-2102 Series

Network Digital Signage Player

Benefits

Rich Content Presentation & Maximum Advertising Efficiency

EDS-2102 series Digital Signage solution supports MPEG 1/2/4, DivX 5, MP3 and other formats for video & audio, and JPEG and BMP formats for graphics. Scrolling text displays multiple languages. Stepsol offers user-definable layout templates with multiple zones of display to deliver maximized advertising efficiency.

Advanced Playback


	Via Composer (demo program)	Via Software Development Kit
4:3 Aspect Ratio	640 x 480, 800 x 600, 1024 x 768	640 x 480, 800 x 600, 1024 x 768, 1280 x 1024*
16:9 Aspect Ratio	1280 x 720 (720p)	848 x 480, 1024 x 576, 1280 x 720 (720p), 1366 x 768*
TV Signal	PAL, NTSC	PAL, NTSC

Note*: Maximized layout resolution that EDS-2102/ EDS-2101 series can support as 1024 x 768 (4:3) and 1280 x 720 (16:9); utilize Stepsol Configurator to scale up the signal resolution to 1280 x 1024 (4:3) and 1366 x 768 (16:9). Portrait mode requires pre-rotated contents.

Optimized Internal Storage Utilization and Content Management

The EDS-2102 is equipped with a 40 GB hard disk drive which can store up to 18 hours of compressed video at 4 Mbps. Playback, operation, and transmission logs and reports are available to support client billing and error tracking.


System Configuration

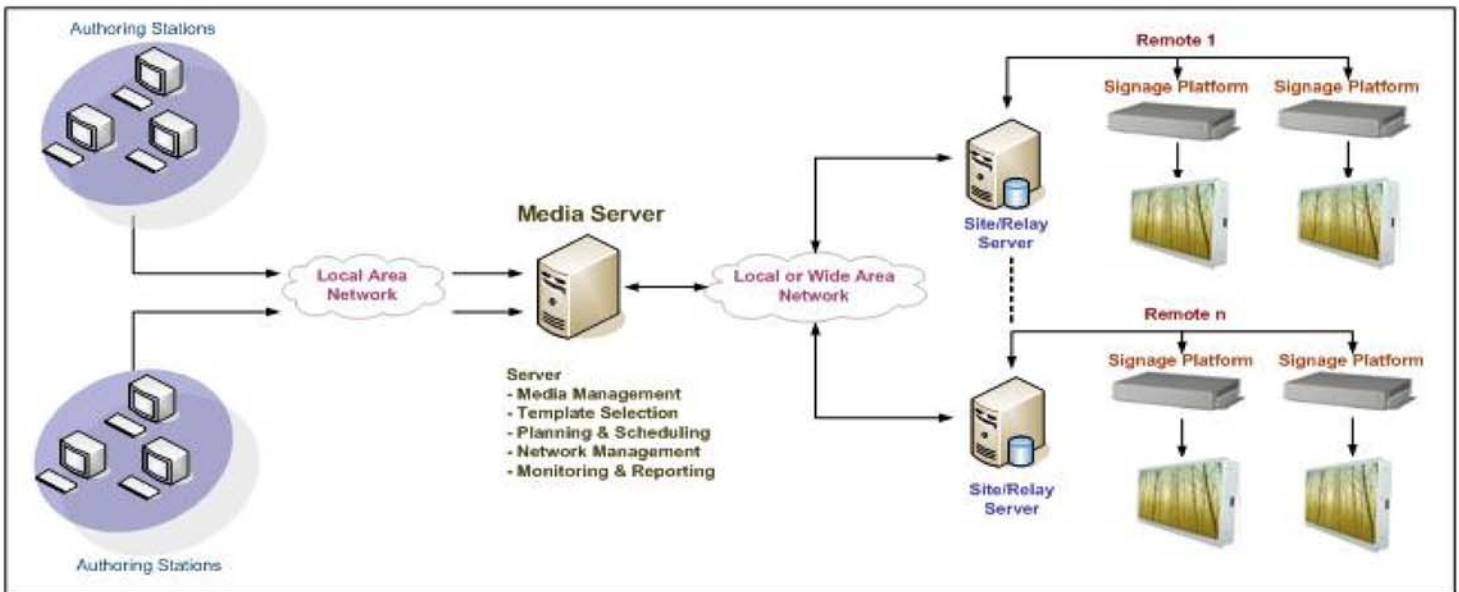

Back I/O Ports



Dimensions

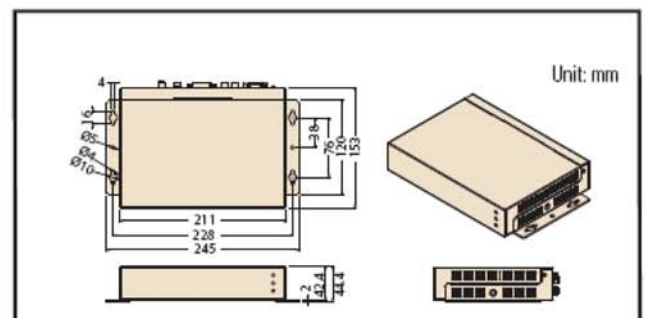

Ordering Information

Part Number	Descriptions
EDS-2102E	EDS-2102E 40 GB storage
EDS-2102VE	EDS-2102V, 40 GB storage, AV-in